

2 Eingänge / 2 TWIN Tuner
2 inputs / 2 TWIN tuner

Ausgangskanäle abschaltbar
output channel can be switched off


Aktive Durchschleifung Eingangssignal
active loop-through input signal



TSH 3082*



TSH 3081

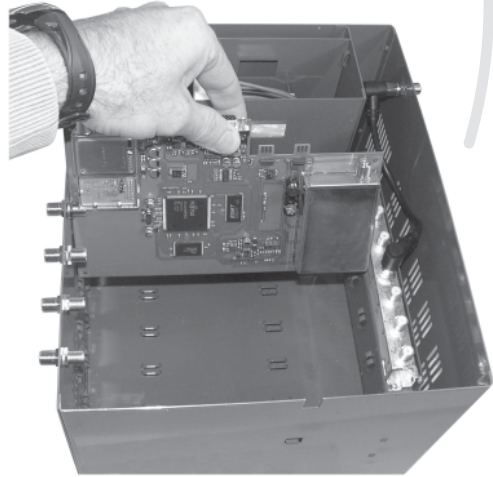

QPSK(S2) - QAM / Quattro

Typ / Type	TSH 3081	TSH 3082*
Artikelnummer / order number	35110	35111
Modulation / modulation	QAM	QAM
Eingangsfrequenz / input frequency	950 - 2150 MHz	950 - 2150 MHz
TV Norm / TV norm	DVB-S / S2	DVB-S / S2
Eingangspegel / input level	45...74 dBµV	45...74 dBµV
Eingang SAT / input SAT	F-Norm	F-Norm
Durchschleifung SAT-ZF / SAT-ZF passage	F-Norm	F-Norm
Demodulator Typ / demodulation type	QPSK / 8PSK	QPSK / 8PSK
Symbolraten / symbol rates	2-40 Mbps (SCPC/MCPC)	2-40 Mbps (SCPC/MCPC)
Modulator		
Konstellationen / constellation	QAM 16, 32, 64, 128, 256	QAM 16, 32, 64, 128, 256
Ausgangs Control / output control	Normal, Inverted	Normal, Inverted
Ausgangskanal / output channel	S2 - C69	S2 - C69
Ausgangspegel / output level	94 dBµV	94 dBµV
Symbolrate / symbol rate	4-50 Mbps (SCPC/MCPC)	4-50 Mbps (SCPC/MCPC)
MER	typ. 39 dB	typ. 39 dB
Impedance / impedance	75	75
Betriebstemperatur / working temperature	0 - 45°C	0 - 45°C
Gewicht / weight	0,3kg	0,3 kg
Maße / dimension (HxTxB / HxDxW)	205 x 140 x 20 mm	205 x 140 x 20 mm

* CI Module / CI modules